




MICHIGAN MANUFACTURING International

Rod Ends GAR..UK, GAR..UK 2RS

- Rod body with right or left-hand female thread.
- It is made up of a maintenance-free radial spherical plain bearing GE..UK or GE..UK 2RS and rod body.
- Surface of rod body zinc plated.

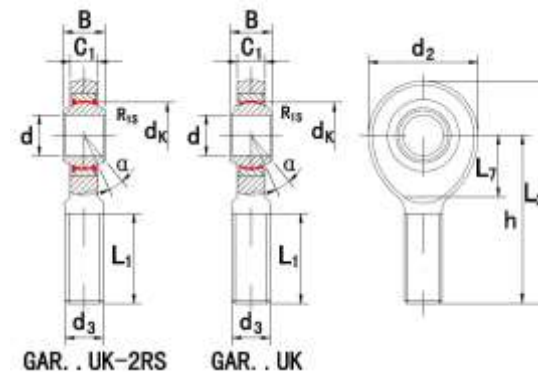

| Part No. | Dimensions mm | | | | | | | | | | | load ratingsKN | | weight kg | |
|--------------|---------------|----------|----|-----|-----------|-----|-----|-----|-------|------|-----|----------------|-----------|-----------|-------------|
| | d | d3 6g | B | C1 | L1 min | d2 | L7 | h | L2 | dk | R1s | a ≈ | dyn. C | | stat. C0 |
| GAR6UK | 6 | M6x1.0 | 6 | 4.4 | 18 | 21 | 12 | 36 | 46.5 | 10 | 0.3 | 13 | 3.60 | 8.15 | 0.017 |
| GAR8UK | 8 | M8x1.25 | 8 | 6 | 22 | 24 | 14 | 42 | 54 | 13 | 0.3 | 15 | 5.85 | 12.9 | 0.029 |
| GAR10UK | 10 | M10x1.5 | 9 | 7 | 26 | 29 | 15 | 48 | 62.5 | 16 | 0.3 | 12 | 8.65 | 17.6 | 0.051 |
| GAR12UK | 12 | M12x1.75 | 10 | 8 | 28 | 34 | 18 | 54 | 71 | 18 | 0.3 | 11 | 11.4 | 24.5 | 0.086 |
| GAR15UK | 15 | M14x2.0 | 12 | 10 | 34 | 40 | 20 | 64 | 83 | 22 | 0.3 | 8 | 17.6 | 36.0 | 0.14 |
| GAR17UK(2RS) | 17 | M16x2.0 | 14 | 11 | 36 | 46 | 23 | 69 | 92 | 25 | 0.3 | 10 | 22.4 | 45.0 | 0.19 |
| GAR20UK(2RS) | 20 | M20x1.5 | 16 | 13 | 43 | 53 | 27 | 78 | 104.5 | 29 | 0.6 | 9 | 31.5 | 60.0 | 0.31 |
| GAR25UK(2RS) | 25 | M24x2.0 | 20 | 17 | 53 | 64 | 32 | 94 | 126 | 35.5 | 0.6 | 7 | 51.0 | 83.0 | 0.56 |
| GAR30UK(2RS) | 30 | M30x2.0 | 22 | 19 | 65 | 73 | 37 | 110 | 146.5 | 40.7 | 0.6 | 6 | 66.5 | 110 | 0.89 |
| GAR35UK2RS | 35 | M36x3.0 | 25 | 21 | 82 | 82 | 42 | 140 | 181 | 47 | 0.6 | 6 | 112 | 146 | 1.40 |
| GAR40UK2RS | 40 | M39x3.0 | 28 | 23 | 86 | 92 | 48 | 150 | 196 | 53 | 0.6 | 7 | 140 | 180 | 1.80 |
| GAR40-1UK2RS | 40 | M42x3.0 | 28 | 23 | 86 | 92 | 48 | 150 | 196 | 53 | 0.6 | 7 | 140 | 180 | 1.85 |
| GAR45UK2RS | 45 | M42x3.0 | 32 | 27 | 94 | 102 | 52 | 163 | 214 | 60 | 0.6 | 7 | 180 | 240 | 2.60 |
| GAR50UK2RS | 50 | M45x3.0 | 35 | 30 | 107 | 112 | 60 | 185 | 241 | 66 | 0.6 | 6 | 220 | 290 | 3.40 |
| GAR50-1UK2RS | 50 | M52x3.0 | 35 | 30 | 107 | 112 | 60 | 185 | 241 | 66 | 0.6 | 6 | 220 | 290 | 3.5 |
| GAR60UK2RS | 60 | M52x3.0 | 44 | 38 | 115 | 135 | 75 | 210 | 277.5 | 80 | 1.0 | 6 | 345 | 450 | 5.90 |
| GAR60-1UK2RS | 60 | M60x3.0 | 44 | 38 | 115 | 135 | 75 | 210 | 277.5 | 80 | 1.0 | 6 | 345 | 450 | 6.02 |
| GAR70UK2RS | 70 | M56x4.0 | 49 | 42 | 125 | 160 | 87 | 235 | 315 | 92 | 1.0 | 6 | 440 | 610 | 8.20 |
| GAR70-1UK2RS | 70 | M72x4.0 | 49 | 42 | 125 | 160 | 87 | 235 | 315 | 92 | 1.0 | 6 | 440 | 610 | 8.38 |
| GAR80UK2RS | 80 | M64x4.0 | 55 | 47 | 140 | 180 | 100 | 270 | 360 | 105 | 1.0 | 6 | 570 | 750 | 12.0 |
| GAR80-1UK2RS | 80 | M80x4.0 | 55 | 47 | 140 | 180 | 100 | 270 | 360 | 105 | 1.0 | 6 | 570 | 750 | 12.2 |