




MICHIGAN MANUFACTURING
International

Radial Spherical Plain Bearings GE..HO 2RS

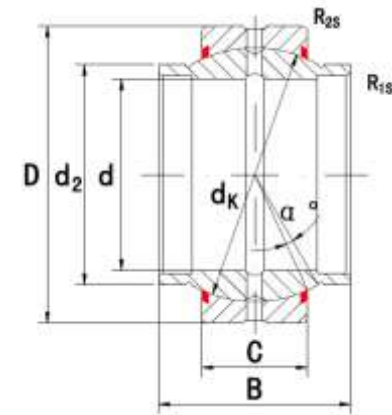

- Outer ring with single split in axial direction.
- inner ring with cylindrical extensions at both sides.
- Lubrication grooves and holes in the outer and inner rings.
- Outer ring with lip seals in both sides.
- Both outer and inner rings are properly phosphate treated.

Part No.	Dimensions mm									load ratings KN		weight kg
	d	d2	D	B	C	dk	R1s min	R2s min	α \approx	dyn. C	stat. C0	
GE17HO2RS	17	21	30	21	10	25	0.2	0.3	3	21.2	106	0.04
GE20HO2RS	20	24	35	24	12	29	0.2	0.3	3	30	146	0.069
GE25HO2RS	25	29	42	29	16	35.5	0.2	0.6	3	48	240	0.12
GE30HO2RS	30	34	47	30	18	40.7	0.2	0.6	3	62	310	0.15
GE35HO2RS	35	40	55	35	20	47	0.3	1.0	3	80	400	0.26
GE40HO2RS	40	45	62	38	22	53	0.3	1.0	3	100	500	0.32
GE45HO2RS	45	52	68	40	25	60	0.3	1.0	3	127	640	0.43
GE50HO2RS	50	57	75	43	28	66	0.3	1.0	3	156	780	0.55
GE60HO2RS	60	68	90	54	36	80	0.3	1.0	3	245	1220	1.10
GE70HO2RS	70	78	105	65	40	92	0.3	1.0	3	315	1560	1.60
GE80HO2RS	80	90	120	74	45	105	0.3	1.0	3	400	2000	2.5