




MICHIGAN MANUFACTURING
International

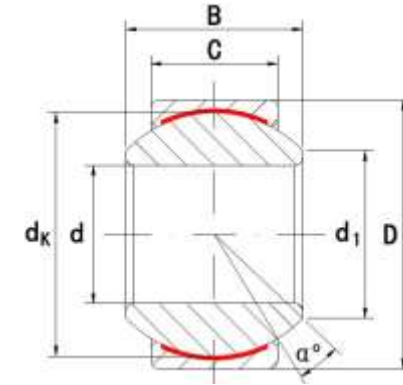

Radial Spherical plain Bearings G..PW

- Outer ring in brass.
- Dimensions same as G..PB.
- Outer race lined with PTFE composite material.

Part No.	Dimensions mm							load ratings KN		weight kg
	d	d1	B	C	D	dk	α ≈	dyn. C	stat. C0	
G5PW	5	7.7	8	6	13	11.112	13	6.2	17	0.007
G6PW	6	8.9	9	6.75	16	12.7	13	7.5	22	0.010
G8PW	8	10.3	12	9	19	15.875	13	12	36	0.016
G10PW	10	12.9	14	10.5	22	19.05	13	17	50	0.031
G12PW	12	15.4	16	12	26	22.225	13	22	67	0.065
G14PW	14	16.8	19	13.5	28	25.4	15	28	86	0.090
G16PW	16	19.3	21	15	32	28.575	15	35	107	0.100
G18PW	18	21.8	23	16.5	35	31.75	15	47	131	0.125
G20PW	20	24.3	25	18	40	34.925	15	51	157	0.180
G22PW	22	25.8	28	20	42	38.1	15	62	191	0.210
G25PW	25	29.5	31	22	47	42.86	15	77	236	0.295
G30PW	30	34.8	37	25	55	50.8	15	103	318	0.425
G35PW	35	37.7	43	28	62	57.15	16	130	400	0.500
G40PW	40	45.2	49	33	75	66.67	17	179	550	0.900
G50PW	50	56.6	60	45	90	82.5	12	302	928	1.640